


DoorSync 9840

121-9840

40 KG AYARLI ÇİFT YÖNE YAVAŞLATICILI HALATLI SÜRME KAPI SİSTEMİ
40 KG ADJUSTABLE FUNICULAR SLIDING DOOR SYSTEM - TWO WAY SOFT CLOSING

Özel Üretim
Special Production

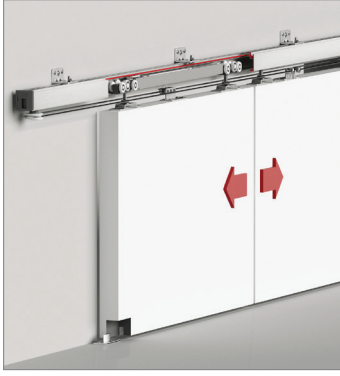

Bilgi / Information


- Minimum kapı genişliği 450 mm olmalıdır.
- Min. Door width 450 mm

Yavaşlatıcı Alternatifi / Soft Closer Alternative


- Sistem üzerinde çift yöne yavaşlatıcı mevcuttur.
- The system has two way soft closing.



121-9840 1 Set İçeriği / 1 Set Includes

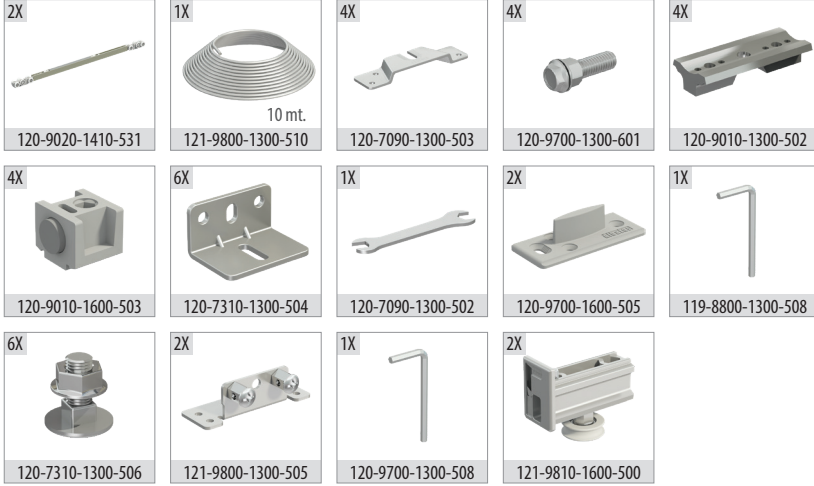


Ray Profilleri / Rail Profiles

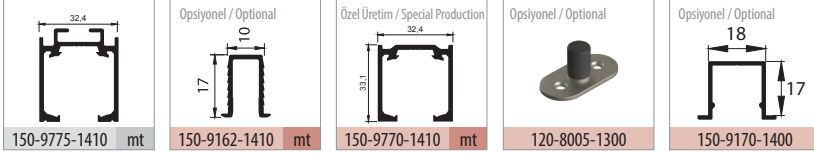

Uygulama / Application



Teknik Detay / Technical Detail

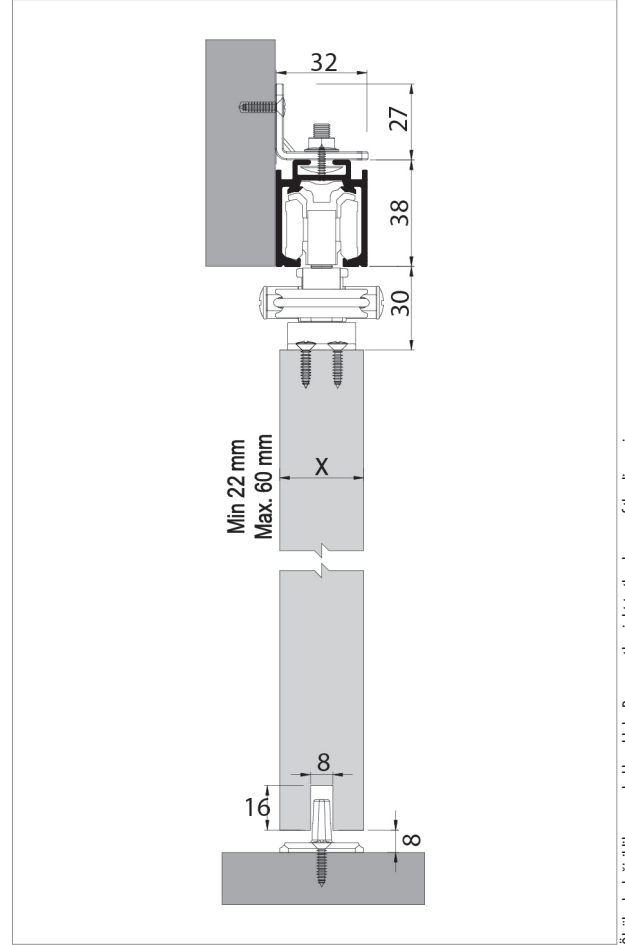

Ölçülerde değişiklik yapma hakkı saklıdır. Reserves the right to the change of the dimensions.

Kod / Code No	Açıklama / Description	Renk / Colour	Birim / Unit			Profil mt. / Profiles mt.	Bağ / Bnd.
121-9840-1410	40 Kg Yavaşlatıcılı Halatlı Sürme Kapı Sistemi / Funicular Sliding Door Has Soft Closing	Gri / Grey	2 Kapı / 1 Set	12	216	-	-
120-8005-1300	Rulmanlı Alt Klavuz Tekeri / Lower Guide Wheel With Bearing	Gri / Grey	1 Adet/1 Pcs.	12	576	-	-
150-9775-1410	Alüminyum Üst Ray Profili / Aluminium Top Rail Profile	Eloksal / Mat Anodized	mt.	-	-	3,0	4,0
150-9162-1410	Alüminyum Alt Klavuz Profili / Aluminium Bottom Slider Profile	Eloksal / Mat Anodized	mt.	-	-	3,0	4,0
150-9170-1400	Alüminyum Alt Klavuz Profili / Aluminium Bottom Slider Profile	Pres / Uncoated	mt.	-	-		3,0