■ **Bilgi / Information**

- Minimum kapı genişliği 870 mm olmalıdır.
- Bu ürün camda delme işlemi gerektirmektedir.
- Min. Door width 870 mm
- This product need drilling on the glass.



■ Yavaşlatıcı Alternatifi / Soft Closer Alternative

- Sistem üzerinde çift yöne yavaşlatıcı mevcuttur.
- The system has two way soft closing.

123-9921 1 Takım İçeriği / 1 Kit Includes



120-9700-1600-531



123-9030-1820-502



123-9900-1300-509



120-7310-1300-504



120-7310-1300-506



120-7090-1300-502



120-9700-1300-509



123-9900-1600-502



120-9700-1300-508



120-9700-1600-502



123-9900-1600-506




123-9900-1600-505




120-9700-1300-511

■ Ray Profilleri / Rail Profiles




150-9750-1400	mt
---------------	----



150-9765-1410 mt

■ Teknik Detay / Technical Detail

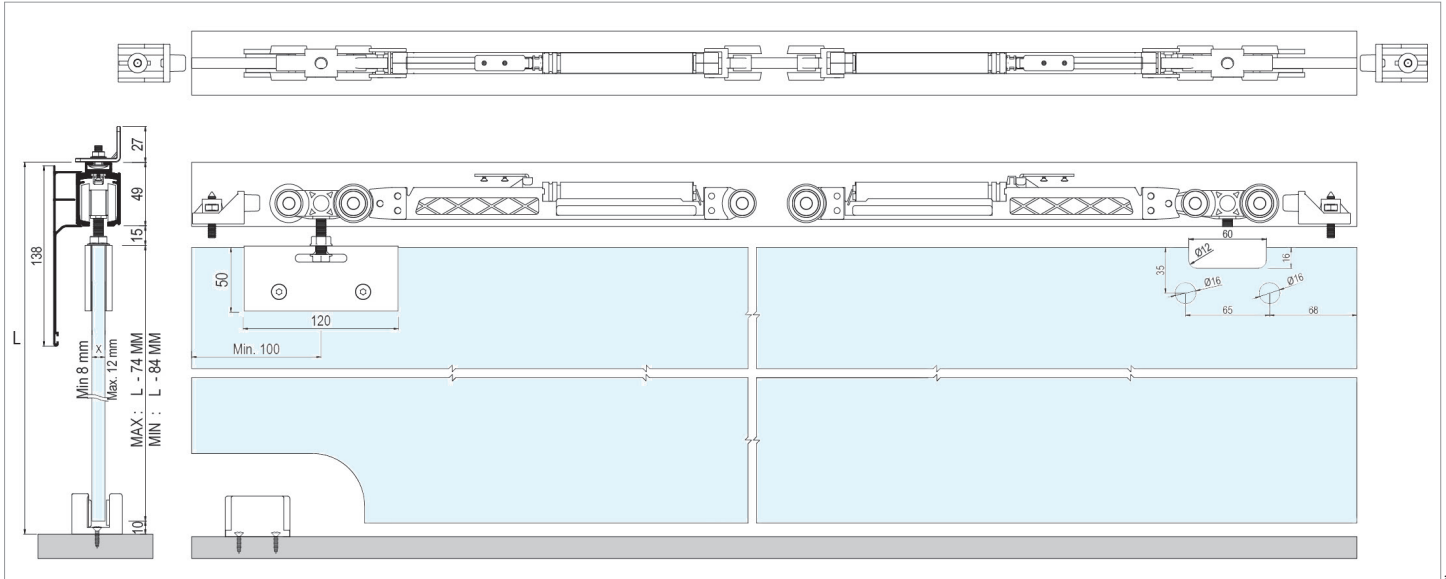

Ölçülerde değişiklik yapma hakkı saklıdır. Reserves the right to the change of the dimensions.

Kod / Code No	Açıklama / Description	Renk / Colour	Birim / Unit			Profil mt. / Profiles mt.			Bağ / Bnd.
123-9921-1820	120 Kg Yavaşlatıcı Sürme Cam Kapı Sistemi / Sliding Glass Door System Has Soft Closing	Gri / Grey	1 Kapı / 1 Kit	12	216	-	-	-	-
150-9750-1400	Alüminyum Üst Ray Profili / Aluminium Top Rail Profile	Pres / Uncoated	mt	-	-	2,0	-	3,0	2 ad/pcs
150-9765-1410	Alüminyum Alın Kapama / Aluminium Cover Front	Eloksal / Mat Anodized	mt	-	-	2,0	-	3,0	2 ad/pcs