




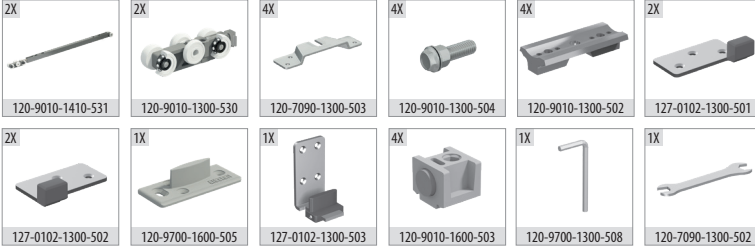


■ MultiDoor 402 1 Set İçeriği / 1 Set Includes

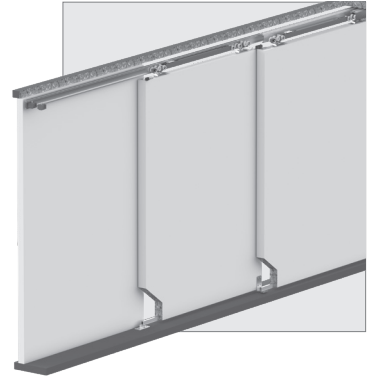

■ MultiDoor 401 1 Takım İçeriği (Opsiyonel Ek Kapı) / 1 Kit Includes (Optional Additional Door)

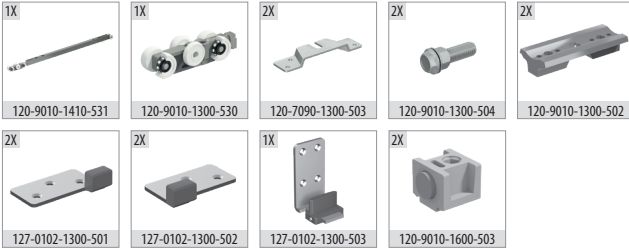

■ Ray Profilleri / Rail Profiles

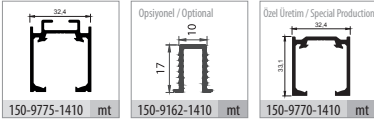

■ Bilgi / Information





- Minimum kapı genişliği 770 mm olmalıdır.
- Min. Door width 770 mm

■ Ürün Özellikleri

- MultiDoor 400 sürgülü teleskopik kapı sistemidir.
- Ahşap panel kapılar için tasarlanmıştır.
- Taşıma kapasitesi kapak başına 60 kg'dır.
- Üst mekanizmaya entegre kapanış yönünde yavaşlatıcı mevcuttur.
- 30 - 50 mm panel kalınlıklarında kullanıma uygundur.
- Her kanat ayrı ray profilinde çalışır.
- İlave kapı seti sayesinde kanat sayısı artırılabilir.
- Yüksek kaliteli rulman sayesinde sessiz ve uzun ömürlü çalışma sağlar.
- Sistemde stoper mevcuttur.
- Estetik görünüm ve sağlıklı çalışma sistemine sahiptir.
- Kolay ve pratik montaj imkanı sunar.
- Ray üzerine monte edilebilen opsiyonel kapama profili sayesinde mekanizma detaylarını gizler.
- Üst mekanizmaya yükseklik ayarı yapılabilir.
- Ray üzerine monte edilebilen opsiyonel kapama profili sayesinde mekanizma detaylarını gizler.
- Minimum kapak genişliği 770 mm olmalıdır.
- MultiDoor 400 Taşıyıcı mekanizmaya entegre yavaşlatıcı sistemine sahiptir.

■ Product Properties

- MultiDoor 400 is a telescopic sliding door system.
- Suitable for wooden panel doors.
- Carrying capacity is 60 kg per door.
- There is a soft closer in the closing direction integrated into the upper mechanism.
- Able to use assembly with 30 - 50 mm wood panel.
- Each door runs on a separate rail profile.
- Due to additional door set, the number of doors can be increased.
- System is working silent and long life working because of high quality ball bearings.
- System has plastic stopper.
- Aesthetic appearance and healthy working system.
- Easy and quick installation.
- It hides the mechanism details thanks to the optional closing profile that can be mounted on the rail.
- Able to adjustment up and down.
- Through the closing profile mounted on the rail, hides the mechanism details.
- Minimum door width should be 770 mm
- MultiDoor 400 Carrier has a retarder system integrated into the mechanism.

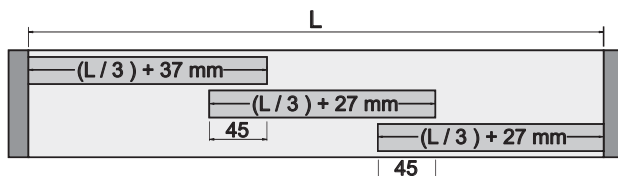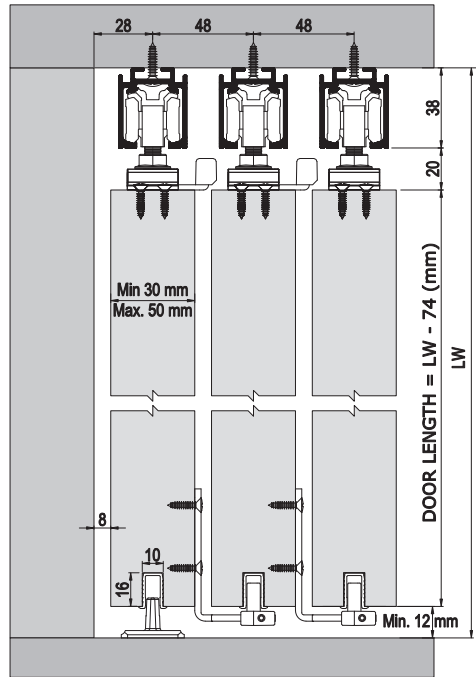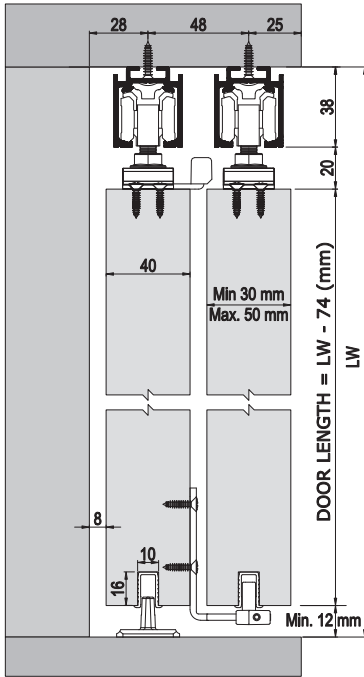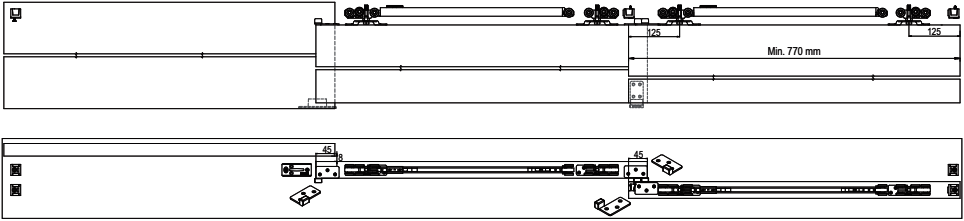

Ölçülerde değişiklik yapma hakkı saklıdır. Reserves the right to the change of the dimensions.